

THE EFFECT OF MICROGRAVITY ON HYDRAULIC JUMP FORMATION DURING FILM ATOMIZATION IN SPACECRAFT PROPULSION

Mohammad Passandideh-Fard¹, Alireza Teymourtash² and Mohammad Khavari³
Ferdowsi University of Mashhad, Iran

ABSTRACT

The impingement of vertical liquid jets on solid surfaces is seen in many different industrial processes such as cooling of the electronic equipments, cleaning of metal surfaces, inducing atomization, fuel injection and atomization in spacecraft propulsion systems, etc. This process is usually accompanied by the occurrence of the very well-known fluid dynamics phenomenon, circular hydraulic jump (CHJ) that is numerically simulated in this paper by using the Volume-of-Fluid (VOF) method. In particular, the effect of microgravity, which is an important parameter in the design of the propulsion systems of spacecrafts traveling in space, on the jump formation and its radius is numerically studied here and the results are discussed. In addition, the atomization process on a rotating disk greatly depends on the hydraulic jump location and its other properties. The numerical results show that by reducing the gravity, the radius of the hydraulic jump increases and the jump becomes more gradual which agrees with the empirical observations.

INTRODUCTION

The purpose of this study is to examine the fluid mechanics of liquid jets impinging onto flat solid surfaces in normal gravity and in microgravity. The focus of the study, in particular, was on prediction of hydraulic jump. Numerical simulations using Volume-of-Fluid method are carried out to determine the parameters for producing hydraulic jump in microgravity, and to examine how the jet impingement process responds to a time varying gravitational field that is typical of drop-tower experiments. In this paper, the results of simulations performed for prediction of a hydraulic jump with circular shape is presented and the effects of microgravity on the jump are discussed.

At the beginning of the twentieth century, the great British physicist, Lord Rayleigh encountered a discontinuity in the geometry of linear one dimensional flow. The structure is called river bore if moving, and hydraulic jump, if stationary and is created due to e.g. variation in river bed. The classical planar hydraulic jump which occurs in open-channel flows is a very old and well-known phenomenon thoroughly considered in the literature. However, the Circular Hydraulic Jump (CHJ) although having a similar name, is completely a different Phenomenon. When a circular vertical liquid jet impacts on a solid horizontal surface, which is called target plate, the flow spreads radially away everywhere – from the stagnation point – until at a particular radius, which is called the radius of the jump, the thickness of the liquid film increases abruptly and a so-called circular or axisymmetric hydraulic jump occurs.

Lord Rayleigh proposed his model by using the continuity and momentum equations and assuming the flow as being inviscid [1]. He assumed that mass and momentum are conserved across the jump, but energy is not. He finally could derive some relations for the inviscid jump. Rayleigh's method was based on the analogy of shallow water and gas theories. The complete theory of inviscid circular hydraulic jump was presented by Birkhoff and Zarantonello in 1957 [2]. However, it is clear that the flow in such a problem is viscous and the inviscid theory is not adequate for predicting the location of the circular hydraulic jump occurrence, since the fluid layer thickness before the jump is typically sufficiently thin, so that the diffusion of vorticity from the lower boundary is dynamically significant. Therefore, the viscosity must be taken into account.

¹ Associate Professor of Mechanical Engineering Department, Email: mpfard@um.ac.ir

² Assistant Professor of Mechanical Engineering Department, Email: teymourtash@um.ac.ir

³ Graduate Student of Mechanical Engineering Department, Email: mohammad.khavari@yahoo.com

The first person, who considered the effect of viscosity in CHJ, was E. J. Watson in 1964 who solved the problem analytically. He, in a strong, long and highly-referred paper, described the flow in terms of a Blasius sublayer developing in the vicinity of the stagnation point, as on a flat plate, and also in terms of a similarity solution. By using the momentum equation, he could finally obtain some relations for predicting the radius of the jump [3]. Watson's model will be considered in detail in the next section.

The validity of Watson's theory has been investigated experimentally by many different researchers throughout the world in the last four decades such as Watson himself [3], Olson and Turkgogan [4], Ishigai et al. [5], Nakoryakov [6], Bouhadeh [7], Craik et al. [8], Errico [9], Vasista [10], Liu and Lienhard [11], Ellegaard et al. [12], and in particular Bush and Aristoff [13, 14]. The agreement between the theory and experiment has been very diverse, from good to bad, depending on the jump conditions. Even Watson himself has presented some data that are in poor agreement with his own theory.

Some other investigators also considered the problem from different aspects. Bowles and Smith studied the circular hydraulic jump -with surface tension considerations- and the small standing waves preceding the jump [15]. Higuera also proposed a model for planar jump by studying the flow in transition region in the limit of infinite Reynolds number [16]. Bohr et al. in 1993 obtained a scaling relation for the radius of the jump [17]. In 1997, they also proposed a simple viscous theory for free-surface flows that can accommodate regions of separated flow and yield the structure of stationary hydraulic jumps [18].

Watanabe *et al.* presented integral methods for shallow free-surface flows with separation in the application of circular hydraulic jump and also the flow down an inclined plane [19]. Ellegaard *et al.* who in 1996 investigated the CHJ empirically [12], for the very first time, observed the polygonal hydraulic jumps in their experiments [20] and reported them in detail in 1999 [21]. In the same year, Yokoi and Xiao considered the transition in the circular hydraulic jump numerically [22]. Three years later, they also studied numerically the structure formation in circular hydraulic jumps with moderate Reynolds numbers [23]. Brechet and Neda also investigated the circular hydraulic jumps and compared their theory and experiments [24].

Avedisian and Zhao studied in detail, the effect of gravity on the circular hydraulic jump and its different parameters experimentally [25]. Rao and Arakeri considered the CHJ empirically and measured the radius of the jump, film thickness and also the length of the transition zone and specially focused on jump formation and transition to turbulent flow [26]. In 2002, Ferreira *et al.* simulated the circular hydraulic jump numerically in order to compare the various upwind schemes for convective term of the Navier-Stokes equations [27].

Gradeck *et al.* studied the impingement of an axisymmetric jet on a moving surface both numerically and experimentally in order to simulate the cooling of a rolling process in the steel making industry [28]. Ray and Bhattacharjee also studied the standing and traveling waves in CHJ [29]. Very recently, the Mikielewicz proposed a simple dissipation model for the CHJ [30]. Also, Kate *et al.* studied experimentally the impinging of an oblique liquid jet on a solid surface which causes non-circular jumps. They also have measured the film thickness and the stagnation pressure for different angles of the incoming jet [31].

In this study, the impingement of a vertical liquid jet on a solid surface is simulated by the method of Volume-of-Fluid using Youngs' algorithm and also the effect of gravity on the circular hydraulic jump is investigated. The results show that this method is capable of simulating the formation of the circular hydraulic jump with proper accuracy and decreasing the gravity will enhance the radius of the jump.

THEORY OF CIRCULAR HYDRAULIC JUMP

Circular hydraulic jumps might take place, when a vertical descending liquid jet impacts a solid horizontal surface. Fig. 1 shows a sample of an empirically observed CHJ. The impingement of this circular jet on the mentioned solid surface is important in a variety of processes such as the fuel tank of space shuttles, aircraft generator coils, coating flows, impingement cooling of electronic devices, laser mirrors and material processing in manufacturing. The general structure of a circular hydraulic jump is shown in Fig. 2.

As mentioned earlier, Watson analyzed the viscous circular hydraulic jump and proposed two models for it. His first model was an inviscid one for downstream of the jump in which he assumed the pressure force to be equal to the rate at which momentum is increasing. In his second model which was viscous, he had used the Prandtl boundary layer theory for development of the flow which is considered here in brief, since it is the first and the only valid theory for CHJ.




Figure 1: *The circular hydraulic jump (Bush and Aristoff (2003))*

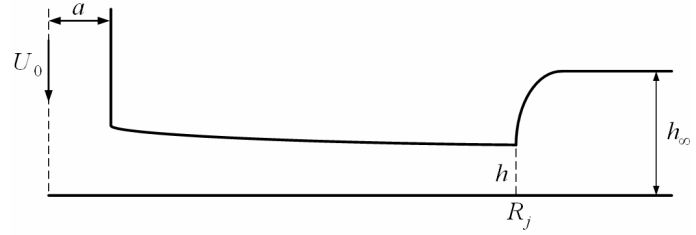


Figure 2: *The general structure of CHJ*

In upstream region where the flow is viscous, Watson divided the flow field into four different regions:

- i.) The region very close to the stagnation point where the radial distance is of the same order of the jet radius ($r = O(a)$) and the boundary layer thickness is of order $\delta = O(\nu a / U_0)$ where a and U_0 are the radius and the velocity of the incoming jet and ν is kinematic viscosity (see Fig. 2);
- ii) The region $r \gg a$ in which the features of stagnation region are not important and the boundary layer is similar to the Blasius sublayer development over flat plate;
- iii) The region from the point where the boundary layer spans the whole fluid layer to the point where the velocity becomes self-similar that can be called a transition region;
- iv) The region in which the similarity solution suggested by Watson is valid.

According to Watson's theory, the viscous solution is valid only in the second and fourth regions and for $Re = Q/(\nu a) \gg 1$ where $Q = \pi a^2 U_0$ is the volumetric flow rate. His approximate solution is clearly not correct in the first region, since the radii of the jump and the jet are of the same order. By neglecting the third region, Watson used the Karman-Pohlhausen method [32] to match the solution of the second region (from Blasius velocity profile) and the solution of the last region for which he assumed the following velocity profile:

$$u = U(r) f\left(\frac{z}{\delta}\right) \quad (1)$$

where $U(r)$ is the velocity at the free surface and f is the similarity function. By using the above velocity profile in momentum integral equation, Watson could derive this explicit relation for the thickness of the boundary layer:

$$r^2 \delta^2 - \frac{c^3 \sqrt{3}}{\pi - c\sqrt{3}} \frac{\nu r^3}{U_0} = C \quad (2)$$

where $c = 1.402$ and C is the integration constant. By an order-of-magnitude analysis, Watson showed that in the region $r = O(a)$, $C = O(\nu a^3 / U_0)$ and in the region $a \ll r < r_0$, $C = O(a^3 / r^3)$ where $r_0 = 0.315 a Re^{1/3}$ is the radial location in which the boundary layer absorbs the whole flow and is also shown by r_v in the literature. The proportionality factor for this critical radius, which is the place that the transition from the second region to the fourth one is occurred, was obtained by matching the two different solutions just mentioned. A similar value was also obtained by Bowles and Smith by means of an exact numerical solution [15].

The viscosity causes the diffusion of vorticity on time scale $t \sim \delta^2 / \nu$ across the fluid layer which is spreading radially. At this time, the flow travels the radial distance $r_0 \sim U_0 t$ which predicts that the boundary layer must include the entire fluid layer depth at the radius $r_0 \sim a Re^{1/3}$ [13]. The features of the fluid flow are thoroughly altering at this critical radius. Before this point, the flow is developing as a Blasius sublayer over flat plate and the surface velocity is of the same order of the incoming jet speed, while after the critical radius, the flow is fully-developed and the surface velocity is negligible in comparison with the incoming velocity and so may be ignored, although Watson obtained a relation for it as:

$$U(r) = \frac{27c^2}{8\pi^4} \frac{Q^2}{\nu(r^3 + l^3)} \quad (3)$$

where $c = 1.402$ and l is an arbitrary constant which is estimated as $l = 0.567a \text{Re}^{1/3}$ by considering the initial development of the boundary layer.

Watson ignored the integration constant C and obtained two relations for predicting the fluid layer depth ξ as:

$$\xi(r) = \frac{a^2}{2r} + \left[1 - \left(\frac{2\pi}{3\sqrt{3}} c^2 \right) \right] \delta \quad r < r_0 \quad (4)$$

$$\xi(r) = \frac{2\pi^2}{3\sqrt{3}} \frac{\nu(r^3 + l^3)}{Qr} \quad r \geq r_0 \quad (5)$$

For reaching his main goal which was predicting the location of the jump occurrence, by assuming the downstream height to be known, Watson used the momentum balance and eventually could derive some relations for the jump radius.

Watson's theory for CHJ has been the subject of many different investigators. He, in his model, had used some assumptions that are very important to note. For instance, he had assumed that the flow after the jump is unidirectional which we now know that is not correct, since the boundary layer separates from the surface downstream of the jump. He also had ignored the effect of surface tension in his analysis. Many researchers have mentioned later that the surface tension must be taken into consideration to improve the accuracy of Watson's model. Craik *et al.* declared in their paper that if the radius of the jump is larger than ten times of the downstream height, then the Watson's theory is accurate enough, but for smaller jumps, the accuracy of the theory is curtailed [8]. The experimental results of Errico are generally far from Watson's theory, since the flow rates in his experiments are low and his jumps are small and deep [9]. Vasista also concluded in his study that for large radius of the jet and also high outer fluid depths, the accuracy of the theory is not good [10]. Liu and Lienhard completed this result and stated that if the radius of the jump decreases or radius of the jet increases, then the upstream Froude number will be larger. They concluded finally that for jumps with large downstream height and high upstream Froude number, the Watson's model is not accurate enough. Therefore, briefly it can be said that the accuracy of Watson's theory is not appropriate for jumps of small radius and height, known as weak jumps [11].

Based on the experiments, the surface tension influence is underscored in small jumps. The empirical observations have shown that reducing the surface tension causes the radius of the circular jump increase and also makes the jump more gradual, i.e. the jump becomes less abrupt [13].

Bush and Aristoff in 2003 have considered the influence of surface tension on CHJ analytically and could propose a very simple valuable relation for the curvature force –which for weak jumps is comparable with pressure forces in momentum equation- and eventually were capable of modifying Watson's theory, i.e. his relations for predicting the jump radius. These modified relations are [13]:

$$\frac{r_1 d^2 g a^2}{Q^2} \left(1 + \frac{2}{Bo} \right) + \frac{a^2}{2\pi^2 r_1 d} = 0.10132 - 0.1297 \left(\frac{r_1}{a} \right)^{3/2} \text{Re}^{-1/2} \quad r < r_0 \quad (6)$$

$$\frac{r_1 d^2 g a^2}{Q^2} \left(1 + \frac{2}{Bo} \right) + \frac{a^2}{2\pi^2 r_1 d} = 0.01676 \left[\left(\frac{r_1}{a} \right)^3 \text{Re}^{-1} + 0.1826 \right]^{-1} \quad r \geq r_0 \quad (7)$$

where d is the downstream height (or outer depth which is also shown by h_∞), g is the gravitational acceleration, r_1 (also shown by r_j or R_j) is the radius of the jump, $Bo = \rho g r_1 \Delta H / \sigma$ is the Bond number and ΔH is the jump height. The Bush and Aristoff relations for radius of the jump differ from those of Watson only in the term including Bond number that contains the surface tension effect which is highlighted in the weak jump regimes. By this modification to Watson's theory, Bush and Aristoff could improve the accuracy of his model in small jump regimes in which his own theory had some imperfections. According to the above relations, if the jump is big enough, then the Bond number will become large and its term in the equations becomes negligible and so the old Watson's relations will be obtained. Also In 1993, Bohr *et al.* proposed a scaling relation for the circular hydraulic jump radius as [17]:

$$R_j \sim q^{5/8} \nu^{-3/8} g^{-1/8} \quad (8)$$

where $q = Q/(2\pi)$ and R_j is the radius of the jump. According to this relation, decreasing gravity and viscosity and also increasing the flow rate will result in bigger jumps. Our numerical results show the same behavior. They verified the validity of this scaling relation by their own experimental observations.

TYPES OF CIRCULAR HYDRAULIC JUMPS

Many different investigators have classified the CHJ in their studies. Based on these categories, there are generally two different kinds of CHJs whose second one has two different types by itself. As introduced by Bush and Aristoff (2003), the type I jump is the standard circular hydraulic jump in which the surface flow is radially outward everywhere that is also marked by unidirectional surface flow in which the separation of the boundary layer occurs after the jump and on the surface. This kind of jump is also called *single jump* and the eddy formed on the surface is also known as *separation bubble* or *recirculating eddy*. The region is also called *separated region*. The experimental results of Craik *et al.* [8] and also Errico [9] have shown that this separated region may be very large and its length substantially changes with the flow conditions.

If the downstream height is increased, the jump changes its structure to type IIa jump. This recently named jump is marked by an under-surface separation bubble on the wall and also by a region of reversed surface flow adjoining the jump at its front. In other words, in this type of jump, flow has an excessive eddy which is called *surface roller* or *surfing wave* and it is like a broken wave in the ocean. In this case, the main stream with high speed flows between the two vortices.

If the downstream height is increased further, the jump will convert to type IIb jump which is called *double* or *tiered jump* in which the thickness of the fluid layer increases twice. The interesting feature is that if the downstream height is decreased again, type IIb will turn back to type IIa. Fig. 3 shows these different types of CHJ. By increasing the outer depth even more, the flow becomes turbulent and the symmetry of the flow is broken and there will be air entrainment on the surface and generally the whole structure will be to some extent similar to that of planar classic hydraulic jump in open channels.

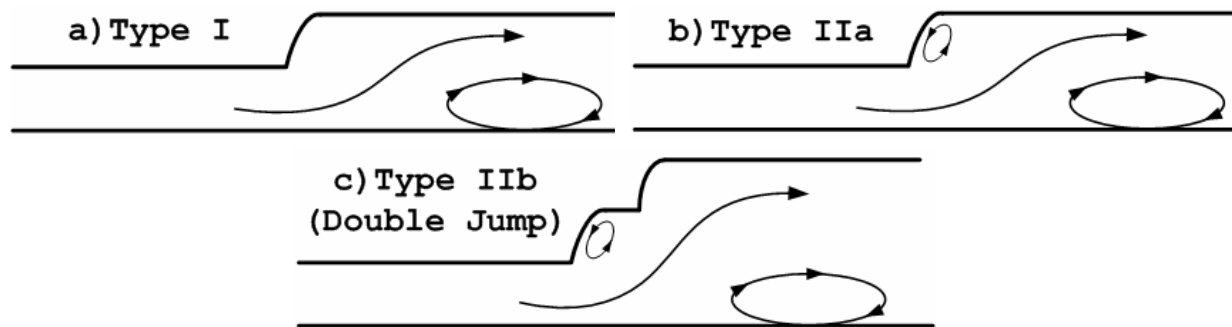


Figure 3: Schematics of different types of circular hydraulic jump (as introduced by Bush and Aristoff (2003))

NUMERICAL METHOD

In this study, the circular hydraulic jump is simulated numerically by solving the Navier-Stokes equations, along with an equation for tracking the free-surface. In this section, we present a brief account of the numerical method. The governing equations are the continuity and momentum equations:

$$\vec{\nabla} \cdot \vec{V} = 0 \quad (9)$$

$$\frac{\partial \vec{V}}{\partial t} + \vec{\nabla} \cdot (\vec{V}\vec{V}) = -\frac{1}{\rho} \vec{\nabla} p + \frac{1}{\rho} \vec{\nabla} \cdot \vec{\tau} + \vec{g} + \frac{1}{\rho} \vec{F}_b \quad (10)$$

where \vec{V} is the velocity vector, p is the pressure, τ is the stress tensor and \vec{F}_b represents the body forces acting on the fluid.

The free surface is tracked by using the volume-of-fluid (VOF) method by means of a scalar field f (known as volume of fluid fraction) whose value is unity in the liquid phase and zero in the vapor. When a cell is partially filled with liquid, i.e. the interface, f will have a value between zero and one:

$$f = \begin{cases} 1 & \text{in liquid phase} \\ > 0, < 1 & \text{at the liquid - gas interface} \\ 0 & \text{in gas phase} \end{cases} \quad (11)$$

The discontinuity in f is propagating through the computational domain according to:

$$\frac{Df}{Dt} = \frac{\partial f}{\partial t} + \vec{V} \cdot \vec{\nabla} f = 0 \quad (12)$$

For the advection of volume fraction f based on Equation (12), different methods have been developed such as SLIC, Hirt-Nichols and Youngs' PLIC [33]. The reported literature on the simulation of free-surface flows reveals that Hirt-Nichols method has been used by many researchers. In this study, however, we used Youngs' method [33], which is a more accurate technique. Assuming the initial distribution of f to be given, velocity and pressure are calculated in each time step by the following procedure. The f advection begins by defining an intermediate value of f :

$$\tilde{f} = f^n - \delta t \vec{\nabla} \cdot (\vec{V} f^n) \quad (13)$$

Then it is completed with a "divergence correction":

$$f^{n+1} = \tilde{f} + \delta t (\vec{\nabla} \cdot \vec{V}) f^n \quad (14)$$

A single set of equations is solved for both phases, therefore, density and viscosity of the mixture are calculated according to:

$$\rho = f\rho_l + (1-f)\rho_g \quad (15)$$

$$\mu = f\mu_l + (1-f)\mu_g \quad (16)$$

where subscripts l and g denote the liquid and gas, respectively. New velocity field is calculated according to the two-step time projection method as follows. First, an intermediate velocity is obtained:

$$\frac{\tilde{\vec{V}} - \vec{V}^n}{\delta t} = -\vec{\nabla} \cdot (\vec{V} \vec{V})^n + \frac{1}{\rho^n} \vec{\nabla} \cdot \vec{\tau}^n + \vec{g}^n + \frac{1}{\rho^n} \vec{F}_b^n \quad (17)$$

The continuum surface force (CSF) method (see Ref. [34]) is used to model surface tension as a body force (\vec{F}_b) that acts only on interfacial cells. Pressure Poisson equation is then solved to obtain the pressure field:

$$\vec{\nabla} \cdot \left[\frac{1}{\rho^n} \vec{\nabla} p^{n+1} \right] = \frac{\vec{\nabla} \cdot \tilde{\vec{V}}}{\delta t} \quad (18)$$

Next, new time velocities are calculated by considering the pressure field implicitly:

$$\frac{\vec{V}^{n+1} - \tilde{\vec{V}}}{\delta t} = -\frac{1}{\rho^n} \vec{\nabla} p^{n+1} \quad (19)$$

MESH STUDY

The cell size used in this study was set based on a mesh refinement study in which the grid size was progressively increased until no significant changes were observed in the simulation results. The mesh resolution was characterized by a parameter called *CPR* defined as the number of cells per radius of the incoming jet. Fig. 4 shows the simulation of the jump for different values of *CPR*. According to this figure, since the radius of the jump does not change significantly by increasing the *CPR* value from 15 to 20, so the optimum mesh size was found to be 20 cells per radius of the jet. This mesh size was used for all the simulations throughout this paper.

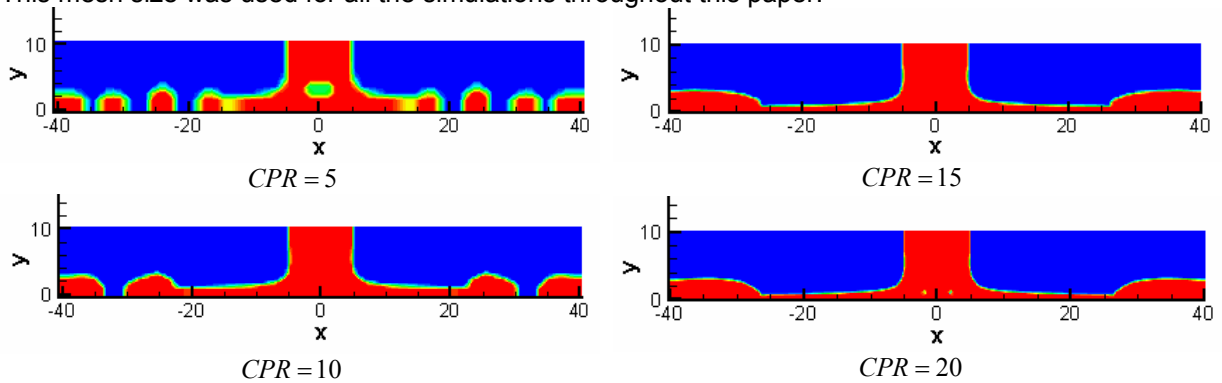


Figure 4: The simulation of the hydraulic jump for different *CPR* values

NUMERICAL RESULTS

By using the Volume-of-Fluid method, we could simulate the circular hydraulic jump and the results are verified by the experimental observations. The location of jump formation and also how it occurs is seen in the numerical method.

The code was first run for a case with no obstacle which is a very important parameter in CHJ studies. Then, a small obstacle was added at the end of the domain to see the behavior of the fluid flow which is shown in Fig. 5 in different time intervals. From this figure, it is clear that the steady state position for the jump is captured. This jump was performed for tap water ($\rho=1000\text{kg}/\text{m}^3$, $\nu=1.122\times 10^{-6}\text{m}^2/\text{s}$, $\sigma=0.073\text{N}/\text{m}$) for which the radius of the incoming jet is $a=5\text{mm}$ and with the flow rate of $Q=30\text{mL}/\text{s}$ and an obstacle of 2mm height at the end of the domain. It must be mentioned that for reducing the time of numerical solution, a thin fluid layer, whose thickness is as the same as the obstacle, is added on the bottom. After the impact on the solid surface, the flow will go through a sudden change in its thickness and consequently a circular hydraulic jump is formed.

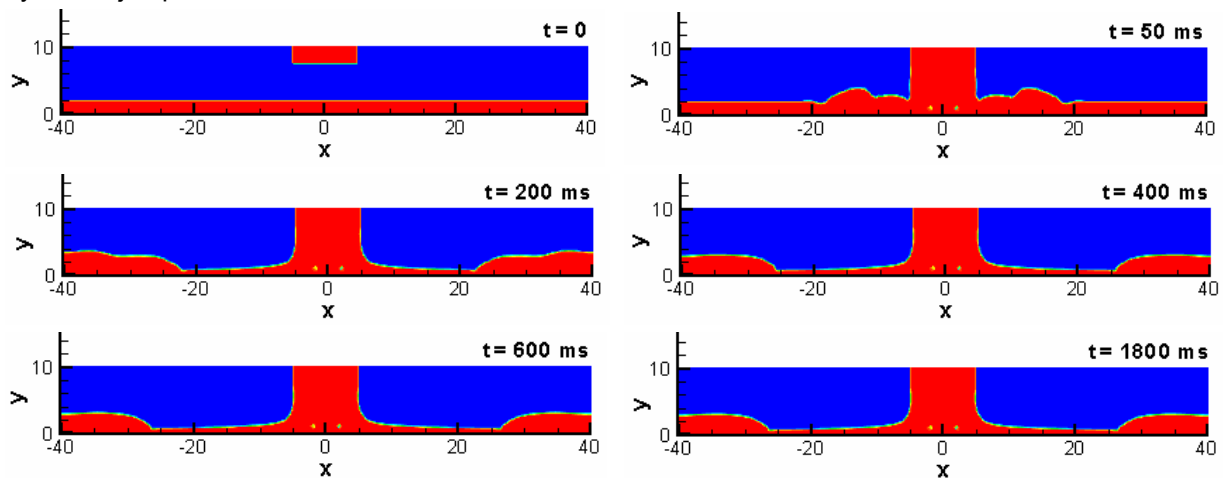


Figure 5: *The evolution of a circular hydraulic jump formation by numerical model*

A 3D simulation of the circular hydraulic jump by VOF method is also shown in Fig. 6 which is compared qualitatively with the experiment of Bush and Aristoff (2003).

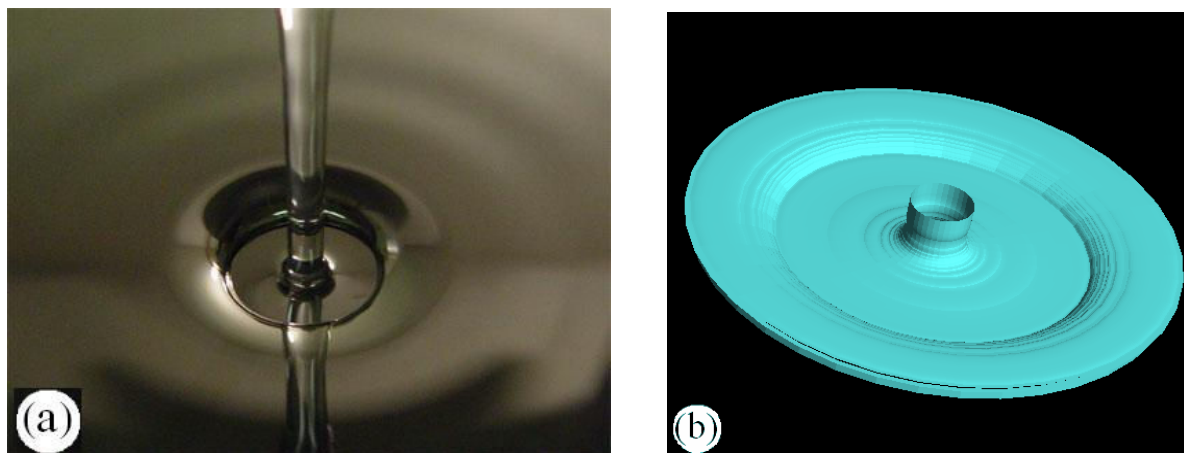


Figure 6: *A qualitative comparison of the formation of a circular hydraulic jump:*
 a) *Experimental result [13]; b) Numerical simulation*

In Fig. 7 the variation of the radius of the jump for different flow rates is plotted and compared with the experimental results of Errico in his PhD dissertation [9]. According to this figure, the radius of the jump is increased by increasing the volumetric flow rate which was sensibly expected too.

Also in Fig. 8, the numerical results for the jump are compared with Watson's theory modified by Bush and Aristoff [13], as the same form as in both papers [3, 13]. In this figure, the LHS of equations (6) and (7) are plotted in terms of the non-dimensional term shown.

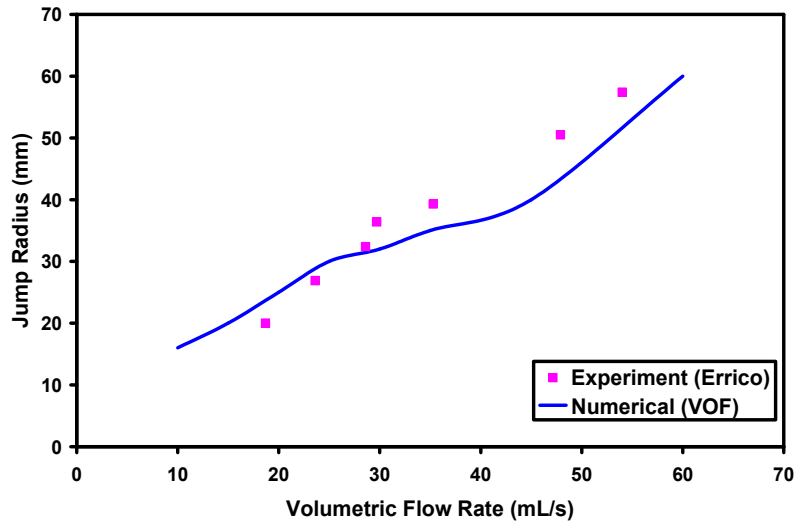


Figure 7: Comparison of CHJ radius from numerical model and experiments (Errico (1989))

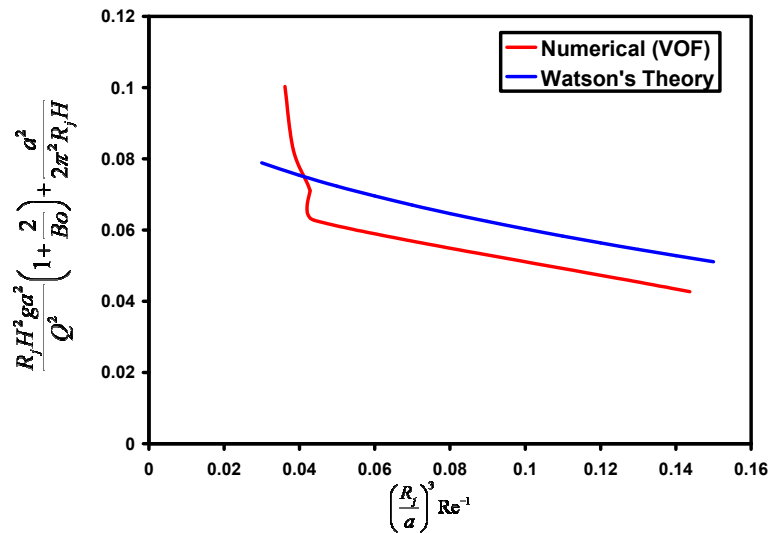


Figure 8: The comparison of numerical result with Watson's theory

CIRCULAR HYDRAULIC JUMP IN MICROGRAVITY CONDITIONS

After the simulation of CHJ by using the VOF method, the effect of microgravity, which is an important parameter in the design of the propulsion systems of spacecrafts traveling in space, on the jump formation and its radius was studied and the results are presented and discussed here.

The effect of gravity on CHJ was experimentally studied in detail by Avedisian and Zhao [25]. Briefly, their experimental results showed that by reducing the gravity, the radius of the hydraulic jump will increase and also the length of the transition zone, across which CHJ occurs, will be larger. We also decided to study the same thing numerically and thus, after the jump reached the steady state conditions, i.e. $t = 1s$, the gravity was suddenly reduced to a very small value, that is $g = 0.01g_0$ where $g_0 = 9.81m/s^2$ and then the effects of such a change in gravity were observed by numerical simulations.

Fig. 9 shows the results of the simulation in low gravity conditions. The CHJ was first simulated in normal gravity conditions for a given case (tap water with the flow rate of $Q = 30mL/s$ and the obstacle height of $2mm$ at the end of the domain) and after reaching the steady state, the jump was then left to form for microgravity conditions for the same case by reducing the gravity to the mentioned value. Fig. 9a shows the jump in normal gravity and Fig. 9b shows the new jump in microgravity conditions. It is quite clear that radius of the hydraulic jump is increased by reducing the gravity which was experimentally observed and reported by Avedisian and Zhao [25]. This behavior is also analytically verified by the inviscid theory, given in non-dimensional form by Middleman [35] in his book in which he showed that the diameter of the circular hydraulic jump is inversely proportional to the gravity.

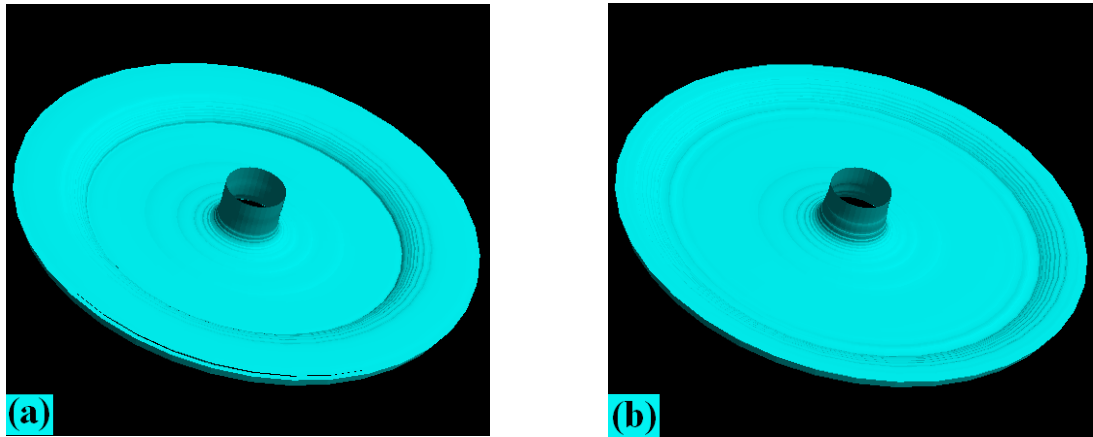


Figure 9: *The effect of gravity on the circular hydraulic jump (3D Simulation); a) Normal gravity and b) Microgravity*

Fig. 10 shows how the circular hydraulic jump responds to this sudden change in gravity. As mentioned before, the jump reaches the steady state after $t = 1s$ and then it adjusts itself to the abrupt change in reducing the gravity. Again it was seen that the jump reached the new steady state conditions after $1s$ i.e. at $t = 2s$. These results have been obtained for the same liquid (water) with the flow rate of $Q = 15mL/s$. From this figure, it is also obvious that the length of the transition zone, the distance between the upstream and downstream regions, in the microgravity conditions is larger than that of the normal gravity conditions (compare the jumps at $t = 1000ms$ and $t = 2000ms$) which was also observed experimentally by Avedisian and Zhao [25].

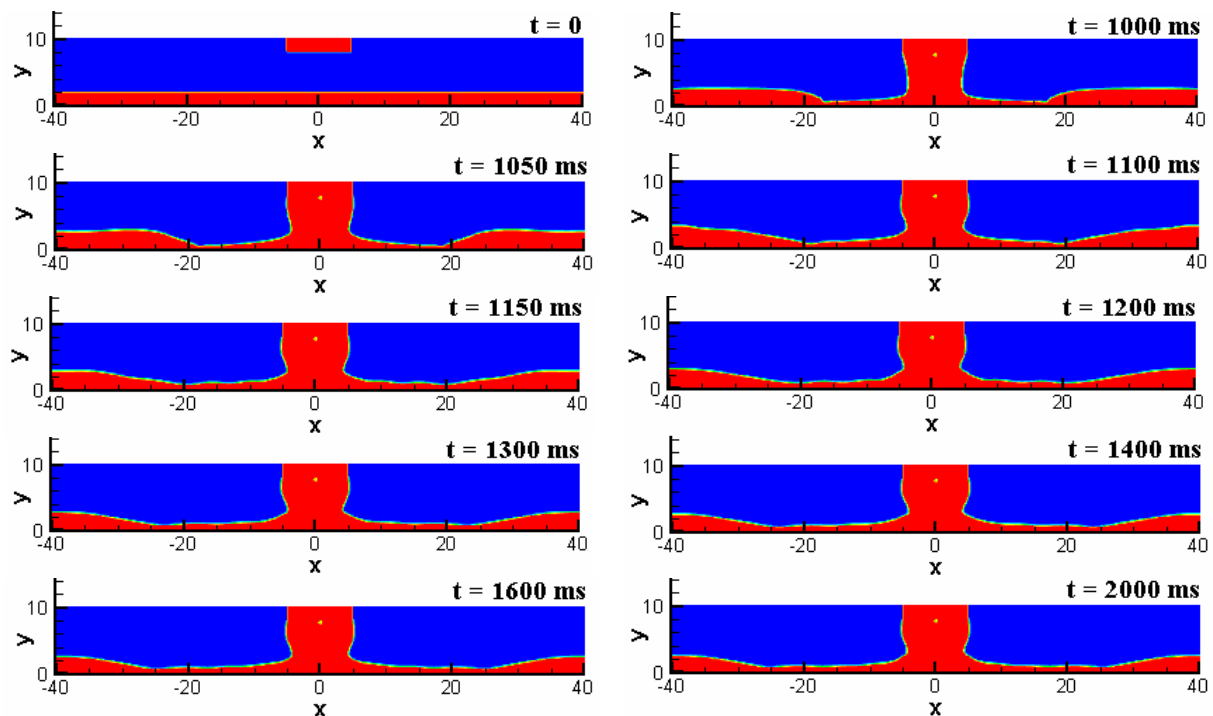


Figure 10: *The response of the circular hydraulic jump to the sudden decrease in gravity*

Fig. 11 also shows cross sectional-view of the simulated jumps for another liquid ($\rho = 1130kg/m^3$, $\mu = 0.016Pa.s$, $\sigma = 0.048N/m$) jet of radius $a = 5.6mm$ and the volumetric flow rate of $Q = 59mL/s$. The jump is first numerically captured for normal gravity conditions and after reaching the steady state, which is about $1.00s$ (shown in Fig. 11a), the gravity was reduced to $0.01g_0$ and then the jump was let to reach the new steady state conditions which is shown in Fig. 11b. This figure again clearly shows that reducing gravity will increase the radius of the circular hydraulic jump significantly, a result which was experimentally verified by the results of Avedisian and Zhao [25].

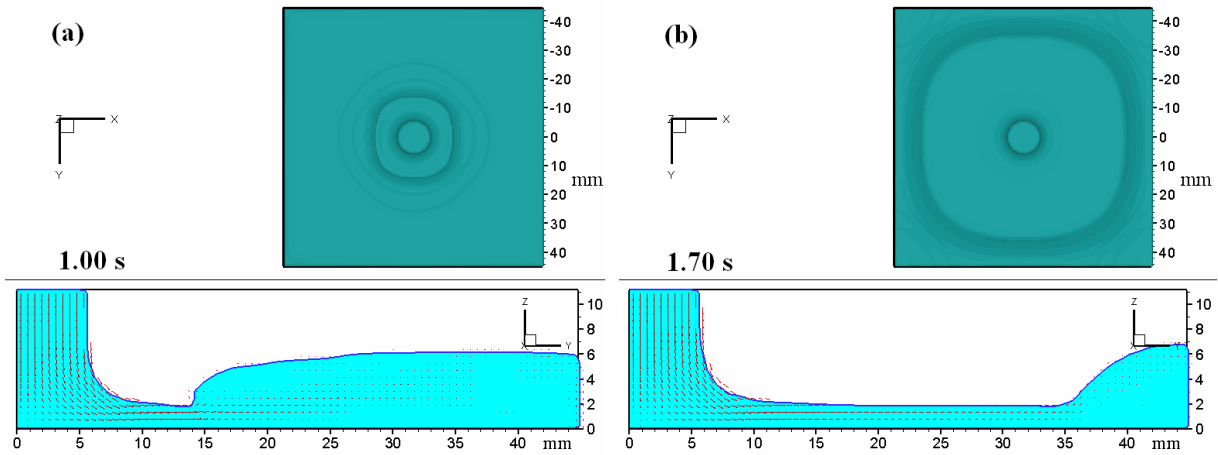


Figure 11: *The effect of gravity on the circular hydraulic jump (cross sectional-view): a) The jump in normal gravity conditions and b) The jump in microgravity conditions*

Also Fig. 12 shows the effect of gravity on the radius of the circular hydraulic jump quantitatively in which the horizontal coordinate is the non-dimensional gravity and the vertical one is the non-dimensional jump radius (see the nomenclature at the end of the paper for definition of the parameters). The plot shows clearly that decreasing the gravity will make the jump larger.

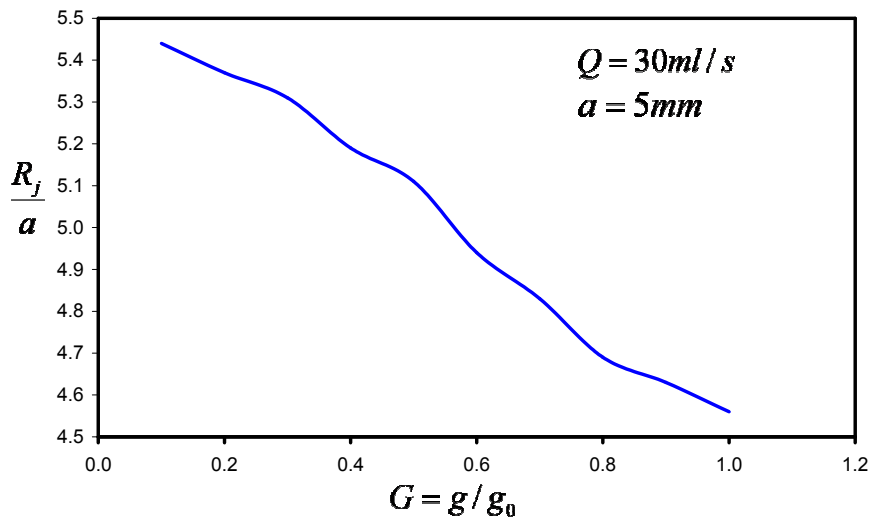


Figure 12: *The effect of gravity on the radius of circular hydraulic jump*

CONCLUSION

In this study, the impingement of vertical liquid jet on a solid horizontal surface which consequently leads to the occurrence of circular hydraulic jump was simulated by the method of Volume-of-Fluid. The results show that this numerical method is capable of simulation of the circular hydraulic jump. The numerical results also indicate that the radius of the circular hydraulic jump increases by enhancing the volumetric flow rate which is verified by the empirical observations. Also, the numerical results are compared with Watson's theory and the agreement is acceptable, especially for larger jumps in which the accuracy of the theory has been shown to be better [8, 11, 13]. Our numerical results also show that by decreasing the gravity, for simulating the hydraulic jump in microgravity conditions, the jump radius will increase which is verified by the experimental results of Avedisian and Zhao [25].

NOMENCLATURE

a	Jet Radius	U_0	Incoming Jet Velocity
Bo	Bond Number	\vec{V}	Velocity Vector
d, h_∞	Downstream Height	t	Time
f	Volume of Fluid Fraction	Greek Letters	
\vec{F}_b	Body Force	δ	Boundary Layer Thickness
g	Gravitational Acceleration	ξ	Fluid Layer Depth
p	Pressure	ν	Kinematic Viscosity
Q	Volumetric Flow Rate	ρ	Density
R_j, r_j, r_l	Jump Radius	σ	Surface Tension
r_0, r_v	Critical Radius	τ	Stress Tensor
Re	Reynolds Number		

REFERENCES

- [1] Rayleigh, Lord, *On the Theory of Long Waves and Bores*, Proc. R. Soc. Lond. A. **90**, p: 324, 1914.
- [2] Birkhoff, G. & Zarantonello, E., *Jets, Wakes and Cavities*. Academic, 1957.
- [3] Watson, E. J., *The Radial Spread of a Liquid Jet Over a Horizontal Plane*, Journal of Fluid Mechanics, Vol. **20**, p: 481-499, 1964.
- [4] Olson, R. & Turkdogan, E., *Radial Spread of a Liquid Stream on a horizontal Plate*, Nature, Vol. **211**, p: 813-816, 1966.
- [5] Ishigai, S., Nakanishi, S., Mizuno, M. & Imamura, T., *Heat Transfer of the Impinging Round Water Jet in the Interference Zone of Film Flow Along the Wall*, Bull. JSME, Vol. **20**, p: 85-92, 1977.
- [6] Nakoryakov, V., Pokusaev, B., Troyan E., *Impingement of an Axisymmetric Liquid Jet on a Barrier*, International Journal of Heat and Mass Transfer, Vol. **21**, p: 1175-1184, 1978.
- [7] Bouhadef, M., *Etalement en Couche Mince d'un Jet Liquide Cylindrique Vertical Saur un Plan Horizontal*, Z. Anagew. Math. Physics, Vol. **29**, p: 157-167, 1978.
- [8] Craik, A., Latham, R., Fawkaes, M., Gibbon, P., *The Circular Hydraulic Jump*, Journal of Fluid Mechanics, Vol. **112**, p: 347-362, 1981.
- [9] Errico, M., *A Study of the Interaction of Liquid Jets With Solid Surfaces*, PhD Thesis, University of California, San Diego, 1986.
- [10] Vasista, V., *Experimental Study of the Hydrodynamics of an Impinging Liquid Jet*. B. Engineering Thesis, MIT, 1989.
- [11] Liu, X. & Lienhard, J., *The Hydraulic Jump in Circular Jet Impingement and in Other Thin Liquid Films*, Experiments in Fluids, Vol. **15**, p: 108-116, 1993.
- [12] Ellegaard, C., Hansen, A., Haaning, A., Hansen, K., & Bohr, T., *Experimental Results on Flow Separation and Transition in the Circular Hydraulic Jump*, Physica Scripta, **T67**, p: 105-110, 1996.
- [13] Bush, J. W. M., Aristoff, J. M., *The Influence of Surface Tension on the Circular Hydraulic Jumps*, Journal of Fluid Mechanics, Vol. **489**, p: 229-238, 2003.
- [14] Bush, J. W. M., Aristoff, J. M., Hosoi, A., *An Experimental Investigation of the Stability of the Circular Hydraulic Jump*, Journal of Fluid Mechanics, Vol. **558**, p: 33-52, 2006.
- [15] Bowles, R. I., & Smith, F. T., *The Standing Hydraulic Jump: Theory, Computations and Comparisons with Experiments*, Journal of Fluid Mechanics, Vol. **242**, p: 145-168, 1992.
- [16] Higuera, F. G., *The Hydraulic Jump in a Viscous Laminar Flow*, Journal of Fluid Mechanics, Vol. **274**, p: 69-92, 1994.
- [17] Bohr, T., Dimon P., Putkaradze, V., *Shallow Water Approach to the Circular Hydraulic Jump*, Journal of Fluid Mechanics, Vol. **254**, p: 635-648, 1993.
- [18] Bohr, T., Putkaradze, V., Watanabe, S., *Averaging Theory for the Structure of Hydraulic Jumps and Separation in Laminar Free Surface Flows*, Phys. Rev. Lett, Vol. **79**, p: 1038-1042, 1997.

- [19] Watanabe, S., Putkaradze, V., Bohr, T., *Integral Methods for Shallow Free-Surface Flows with Separation*, Journal of Fluid Mechanics, Vol. **480**, p: 233-265, 2003.
- [20] Ellegaard, C., Hansen, A., Haaning, A., Hansen, K., Marcusson, A., Bohr, T., Lundbek Hansen, J., Watanabe, S., *Creating Corners in Kitchen Sinks*, Nature, Vol. **392**, p: 767, 1998.
- [21] Ellegaard, C., Hansen, A., Haaning, A., Hansen, K., Marcusson, A., Bohr, T., Lundbek Hansen, J., Watanabe, S., *Polygonal Hydraulic Jumps*, Nonlinearity, Vol. **12**, p: 1-7, 1999.
- [22] Yokoi, K., Xiao, F., *A Numerical Study of the Transition in the Circular Hydraulic Jumps*, Physics Letters, **A 257**, p: 153-157, 1999.
- [23] Yokoi, K., Xiao, F., *Mechanism of Structure Formation in Circular Hydraulic Jumps: Numerical Studies of Strongly Deformed Free-Surface Shallow Flows*, Physica, **D 161**, p: 202-219, 2002.
- [24] Brechet, Y., Neda, Z., *On the Circular Hydraulic Jump*, American Journal of Physics, Vol. **67** (8), p: 723-731, 1999.
- [25] Avedisian, C., Zhao, Z., *The Circular Hydraulic Jump in Low Gravity*, Proc. R. Soc. Lond. A, Vol. **456**, p: 2127-2151, 2000.
- [26] Rao, A., Arakeri, J., *Wave Structure in the Radial Film Flow with a Circular Hydraulic Jump*, Experiments in Fluids, Vol. **31**, p: 542-549, 2001.
- [27] Ferreira, V., Tome, M., Mangiavacchi, N., Castelo, A., Cuminato, J., Fortuna, A., McKee, S., *High-order Upwinding and the Hydraulic Jump*, International Journal for Numerical Methods in Fluids, Vol. **39**, p: 549-583, 2002.
- [28] Gradeck, M., Kouachi, A., Dani, A., Arnoult, D., Borean, J., *Experimental and Numerical Study of the Hydraulic Jump of an Impinging Jet on a Moving Surface*, Experimental Thermal and Fluid Science, Vol. **30**, p: 193-201, 2006.
- [29] Ray, A., Bhattacharjee, J., *Standing and Traveling Waves in the Shallow-Water Circular Hydraulic Jump*, Physics Letters, **A 371**, p: 241-248, 2007.
- [30] Mikielewicz, J., Mikielewicz, D., *A Simple Dissipation Model of Circular Hydraulic Jump*, International Journal of Heat and Mass Transfer, In Press, 2008.
- [31] Kate, R., Das, P., Chakraborty, S., *An Investigation on Non-circular Hydraulic Jumps formed due to Obliquely Impinging Circular Liquid Jets*, Experimental Thermal and Fluid Science, Vol. **32**, p: 1429-1439, 2008.
- [32] Schlichting, H. *Boundary Layer Theory*, McGraw-Hill: New York, 1968.
- [33] Youngs D. L., *Time Dependent Multi material Flow with Large Fluid Distortion*, Numerical Methods for Fluid Dynamics, N.Y., p: 273-285, 1982.
- [34] Brackbill, J. U., Kothe D. B., and Zemach C., *A Continuum Method for Modeling Surface Tension*, Journal of Computational Physics, Vol. **100**, p: 335-354, 1992.
- [35] Middleman, S., *Modeling Axisymmetric Flows*, Ch. 5. Academic, 1995.