

# Certificate of Completion

SCIENCE AND ENGINEERING INSTITUTE

THIS CERTIFICATE IS PROUDLY AWARDED TO

Rasool Khodabakhshian

Paper Title: Combination of Conventional Imaging and Spectroscopy  
Methods for Food Quality Evaluation (W021)

for your excellent oral presentation at the conference and your significant  
contribution to the success of 2014 The 4th International Workshop on  
Computer Science and Engineering - Summer (WCSE 2014), Dubai, UAE,  
August 22-23, 2014.

Chair



*Alice Wu*

For the Chair of  
SCIENCE AND ENGINEERING INSTITUTE

Dr. Alice Wu  
Conference Executive  
SCIEI.ORG

Authorized Signature(s)

## *Acceptance Letter*

2014 The 4th International Workshop on Computer Science and Engineering (WCSE 2014)

Dubai, UAE, August 22-23, 2014

<http://www.sciei.org/wcse/>



**Paper ID:** W021

**Paper Title:** Combination of Conventional Imaging and Spectroscopy Methods for Food Quality Evaluation

Dear Rasool Khodabakhshian, Bagher Emadi, Mehdi Khojastehpour and Mahmood Reza Golzarian,

With heartiest congratulations I am pleased to inform you that based on the recommendations of the reviewers and the Technical Program Committees, your paper identified above has been accepted for publication and oral presentation by **2014 The 4th International Workshop on Computer Science and Engineering (WCSE 2014)**.

WCSE 2014 conference received over 30 submissions from countries and regions so far, reviewed by international experts; the acceptance ratio is controlled below 40%. Your paper will be published in the conference proceeding after registration.

Herewith, the conference committee sincerely invites you to come to present your paper at WCSE 2014 to be held in **Dubai, UAE, August 22-23, 2014**.

Yours sincerely,

WCSE 2014 Organizing Committees  
<http://www.sciei.org/wcse>

Dubai, UAE

## Combination of Conventional Imaging and Spectroscopy Methods for Food Quality Evaluation

Rasool khodabakhshian<sup>1,a</sup>, Bagher Emadi<sup>2,b</sup>, Mehdi Khojastehpour<sup>3,c</sup>,  
Mahmood Reza Golzarian<sup>4,d</sup>

<sup>1</sup> Department of Mechanics of Biosystem Engineering, Ferdowsi University of Mashhad, MASHHAD, IRAN (corresponding author's phone: +989153007648<sup>2</sup> Full address of second author, including country

<sup>a</sup>ra\_kh695@stu-mail.um.ac.ir, <sup>b</sup> bagher\_emadi@yahoo.com, <sup>c</sup>mkhpour@yahoo.com, <sup>d</sup>mahmood.golzarian@unisa.edu.au

**Keywords:** Computer vision, food quality, multivariate analysis, spectroscopy.

**Abstract.** During the past few decades a number of different techniques have been explored as possible instrumental methods for quality evaluation of food products. In recent years, hyperspectral imaging technique has been regarded as a smart and promising analytical tool for analyses conducted in research, control, and industries. The main impetus for developing a hyperspectral imaging system was to integrate spectroscopic and imaging techniques to enable direct identification of different components and their spatial distribution in the tested sample. The need for fast and reliable methods of authenticity and object identification has increased the interest in the application of hyperspectral imaging for quality control in the agricultural, pharmaceutical, and food industries. So, the aim of this paper was to give brief introduction to hyperspectral imaging system. The first step of the study consists of fundamentals, characteristics, configuration, terminologies, merits and demerits, limits and potential of hyperspectral imaging. The second step presents potential applications of hyperspectral imaging in food analysis.

### Introduction

Quality is a key factor for modern food industry because the high-quality of product is the basis for success in today's highly competitive market. In the food industry, the quality evaluation still heavily depends on manual inspection, which is tedious, laborious, and costly, and is easily influenced by physiological factors, inducing subjective and inconsistent evaluation results. To satisfy the increased awareness, sophistication and greater expectation of consumers, it is necessary to improve quality evaluation of food products [1]. If quality evaluation is achieved automatically, production speed and efficiency can be improved in addition to the increased evaluation accuracy, with an accompanying reduction in production costs.

In the light of providing a more consistent and objective evaluation of fruit quality, optical approaches, such as machine vision and spectroscopy, are considered as the most potential methods complementary to the human inspectors on the automatic fruit sorting line [2]. Machine vision has success in categorizing fruits with respect to size, color and other appearance indices. However, its capacity for detecting surface defects is still limited and often not reliable [3], [4]. Spectroscopy has been involved in the food research for dozens of years. Common applications have included not only the quantitative prediction of chemical properties of agricultural products [4]-[8], but also the classification of samples into different classes [9], [10]. However, since spectroscopy generally measures an aggregate amount of light reflected or transmitted from a specific area of a sample (point measurement), it does not contain spatial information about the product.

As a rapid, economic, consistent and even more accurate and objective inspection tool, Hyperspectral imaging have been used increasingly in the food industry for quality evaluation purposes [11]. Hyperspectral imaging is a technique that combines conventional imaging and spectroscopy to acquire both spatial and spectral information from an object. Because of this combined feature of imaging and spectroscopy, hyperspectral imaging can enhance and/or expand our

capability of detecting some chemical constituents in an object as well as their spatial distributions. The data collection and processing are, however, still time-consuming, which make it at this moment impractical for being used on line as such. Reference [12] suggested wavelet transforms to shorten the computation time and to reduce the storage space required. Another approach to make this technique feasible is to establish a multispectral imaging system based on the analysis of hyperspectral images. This can be done by selecting several optimal filters for the camera or Light Emitting Diode (LEDs) for the illumination, which correspond to the relevant wavebands for the measurement of the property changes of fruits.

During the last decade, considerable research effort has been directed at developing hyperspectral imaging for food quality evaluation. Reference [13] recently developed a new hyperspectral imaging-based spatially resolved method for rapid, non contact measurement of the optical properties of turbid materials over the visible and shortwave near-infrared region. The aim of this paper is to investigate fundamentals and the recent applications of hyperspectral imaging in image processing for food quality evaluation. Although this paper focuses on food quality evaluation, the techniques discussed are of relevance to the wider research topic of image processing.

## Materials and methods

**Fundamental of hyperspectral imaging.** Hyperspectral imaging is the combination of two mature technologies: spectroscopy and imaging. In this technology, an image is acquired over the visible and near-infrared (or infrared) wavelengths to specify the complete wavelength spectrum of a sample at each point in the imaging plane. Hyperspectral images are composed of spectral pixels, corresponding to a spectral signature (or spectrum) of the corresponding spatial region. A spectral pixel is a pixel that records the entire measured spectrum of the imaged spatial point. Here, the measured spectrum is characteristic of a sample's ability to absorb or scatter the exciting light.

**Hardware.** A hyperspectral imaging system in line-scan mode (also called pushbroom mode) generally consists of four basic components: illumination, an imaging spectrograph, a camera (CCD or CMOS) and a zoom lens. Figure 1 shows the schematic diagram and hardware components of the hyperspectral imaging system is used for measuring the spatial distribution of diffuse reflectance.

**Image calibration.** Hyperspectral image calibration is required to account for spectral and spatial variations in light source intensity, detector response, and system optics. Calibration of spectral response can be achieved using narrow-band light sources (e.g. laser 'pen lights') or calibrated standard reference materials such as NIST (National Institute of Standards and Technology) glasses, and this calibration should be verified periodically. Spatial calibration over the field of view of the HSI instrument should be carried out using a spatially and spectrally homogeneous sample (e.g. flat ceramic tile). Intensity calibration is required to compensate for changes in the detector response and should be carried out using certified reference standards (e.g. Spectralon grayscale standards). Development of suitable reflectance standards and use of correct calibration transformations remains a challenge in hyperspectral imaging. Spatial and intensity calibration should, at the very minimum, be carried out on a daily basis as small changes in electrical power sources, illumination, detector response and system alignment may result in significant changes in the detected response. Inclusion of internal reference standards in each hyperspectral image acquired is recommended; this is also a good way to monitor the performance of the system over time.

**Image processing.** Images from different planes in a hypercube may be combined using algorithms based on straightforward mathematical operators, e.g. addition, subtraction, multiplication and division. Image processing is also carried out to convert the contrast developed by the classification/regression analysis into a picture depicting component distribution. Greyscale or colour mapping with intensity scaling is commonly used to display compositional contrast between pixels in an image. Image fusion or false colour mapping, in which two or more images at different wavebands are represented as red, green, or blue channels and combined to form a new RGB image may be employed to enhance apparent contrast between distinct regions of a sample.

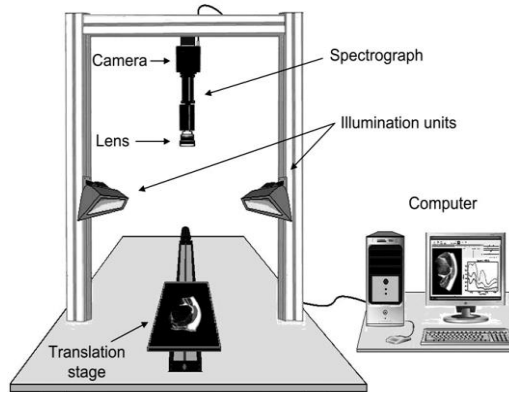


Fig. 1. Configuration of the hyperspectral imaging system.

**Hyperspectral imaging software.** Many software tools have been developed for hyperspectral image processing and analysis. One of the most popular, commercially available analytical software tools is the Environment for Visualizing Images (ENVI) software (Research Systems Inc., Boulder, CO, USA) which is widely used in food engineering [14]-[20]. ENVI is a software tool that is used for hyperspectral image data analysis and display. It is written totally in the interactive data language (IDL), which is based on array and provides integrated image processing and display capabilities. ENVI can be used to extract spectra, reference spectral libraries, and analyze high spectral resolution images from many different sensors.

MATLAB (The Math-Works Inc., Natick, MA, USA) is another widely used software tool for hyperspectral image processing and analysis, which is a computer language used to develop algorithms, interactively analyze data, and view data files. MATLAB is a powerful tool for scientific computing and can solve technical computing problems more flexibly than ENVI and faster than traditional programming languages, such as C, C++, and Fortran. This makes it more and more popular in food engineering [14]-[21]. The graphics features which are required to visualize hyperspectral data are available in MATLAB. These include 2-D and 3-D plotting functions, 3-D volume visualization functions, and tools for interactively creating plots.

## Results and discussion

In the last part of this paper, some fundamental concepts about hyperspectral/multispectral imaging were investigated. As the second part, this paper introduces latest investigative and exploratory studies in major areas that have been impacted by this technique include meat, fruit and vegetables, and others. Tables I and II summarize main hyperspectral and multispectral imaging applications in the area of safety and quality evaluation of food and agricultural products.

Table I: Hyperspectral Imaging Applications for Food and Agricultural Products

Class	Product	Application	Reference
Fruits and Nuts	Apple	Firmness evaluation	[22]
	Walnut	Shell and meat differentiation	[23]
	Citrus	Rottenness detection	[21]
	Citrus	Canker detection	[20]
	Banana	Quality and maturity evaluation	[24]

Vegetables	Tomato	Ripeness evaluation	[25]
	Cucumber	Quality evaluation	[26]
	Mushroom	Bruise detection	[27]
	Onion	Sour skin disease detection	[28]
	Potato	Cooking time prediction	[29]
Meat	Chicken	Skin tumor detection	[30]
	Pork	Quality evaluation	[19]
	Fish	Moisture and fat evaluation	[31]
	Beef	Microbial spoilage detection	[32]
	Lamb	Lamb type discrimination	[33]
Grains	Corn kernel	Constituent evaluation	[34]
	Wheat kernel	Sprout damage detection	[35]
	Corn kernel	Aflatoxin detection	[36]
Beverages	Milk	Fat content evaluation	[13]
	Tea	Quality classification	[37]
	Milk	Melamine detection	[38]

**Table II:** Multispectral Imaging Applications for Food and Agricultural Products

Product	Application	Wavelength (nm)	Reference
Tomato	Maturity evaluation	530, 595, 630, 850	[39]
Apple	Defect and feces detection	530, 665, 750, 800	[40]
Chicken	Wholesomeness inspection	580, 620	[41]
Tea	Category sorting	580, 680, 800	[42]
Peach	Maturity evaluation	450, 675, 800	[43]

Commercial hyperspectral/multispectral imaging systems for food and agricultural applications [e.g., Hyperspec Inspector produced by Headwall Photonics (Fitchburg, MA, USA) and SisuCHEMA

produced by Specim (Oulu, Finland)] started appearing on the market in recent years. Such integrated systems generally include essential components in a whole package (e.g., light source, wavelength dispersive device, camera, embedded computer, hard drive, and software) for implementation of spectral imaging techniques. The commercialization of the spectral imaging systems will broaden the scope of the applications for food safety and quality evaluation.

Recent works show a bright future of using hyperspectral imaging for the quality inspection of more and more food products. The successful outcome of applying hyperspectral imaging would improve quality and safety measurement of finfish products to meet consumer expectations, label accurate quality factors on the packaging of retail products to benefit consumers, and help the food industry to better understand and control the food quality and safety, leading to increased competitiveness in international markets. However, there are still some limitations and restrictions to be overcome for hyperspectral imaging before move this technology from the laboratories to the industry real-time inspections, including improving the hardware and software of hyperspectral imaging system to reduce the instrument cost and increase the measurement speed, extracting the most important object features from hyperspectral images to develop feature based imaging systems like multispectral imaging, investigating the most suitable model calibration strategy with high accuracy, efficiency, and robustness for the inspection, and transferring the systems and algorithms, which are dependent on the laboratory environment to industrial conditions.

## Conclusion

This paper reviews the recent developments in Hyperspectral techniques for the agricultural and food industry. Hyperspectral techniques have been used increasingly in industry for assessment and estimation purposes as they can provide rapid, economic, hygienic, consistent and objective assessment. Hyperspectral imaging is an important analytical technique widely used in the agro-food industry applications for quality organization and food safety inspection, in that it exploits the optical properties of materials for quality assessment. Hyperspectral imaging and imaging spectroscopy have own advantage of extracting spectral information from a larger area of the specimen to give more minute and detailed information from the whole specimen. These techniques especially hyperspectral imaging require high speed computer and large memory to save the bulky data. Furthermore using high-speed computer with an advanced processing and image acquisition system, the hyperspectral imaging technique presents a lot of prospects for automated quality classification of food products.

## References

- [1] T. Brosnan and D.W. Sun: Improving quality inspection of food products by computer vision—a review *J Food Eng* vol. 61(2004), p. 3-16.
- [2] R. L. Shewfelt and S.E. Prussia: *Postharvest Handling: A Systems Approach* Academic Press Inc., California (1993).
- [3] R. Lu: Detection of bruises on apples using near-infrared hyperspectral imaging *Trans ASAE* vol. 46 (2003), p. 523-530.
- [4] V. Leemans and M.F. Destain: A real-time grading method of apples based on features extracted from defects *J Food Eng* vol. 61(2004), pp. 83-89.
- [5] J. Lammertyn, B. Nicolai, K. Ooms, V. De Smedt and J. De Baerdemaeker: Non-destructive measurement of acidity, soluble solids, and firmness of Jonagold apples using NIR-spectroscopy *Trans ASAE* vol. 41 (1998), p. 1089-1094.
- [6] Z. Schmilovitch, I. Shmulevich, A. Notea and E. Maltz: Near infrared spectrometry of milk in its heterogeneous state *Comput Electron Agric* vol. 29 (2000), p. 195-207.
- [7] S. Kawamura, M. Natsuga, K. Takekura and K. Itoh: Development of an automatic rice-quality inspection system *Comput Electron Agric* vol. 40 (2003), p. 115-126.

- [8] B. Park, J.A. Abbott, K.J. Lee, C.H. Choi and K.H. Choi: Near-infrared diffuse reflectance for quantitative and qualitative measurement of soluble solids and firmness of Delicious and Gala apple *Trans ASAE* vol. 46 (2003), p. 1721-1731.
- [9] B. Park, Y.R. Chen, W.R. Hruschka, S.D. Shackelford and M., Koohmaraie: Near-infrared reflectance analysis for predicting beef longissimus tenderness *J Anim Sci* vol. 76 (1998), p. 2115-21120, 1998.
- [10] D. Moshou, E. Vrindts, B. De Ketelaere, J. De Baerdemaeker and H. Ramon: A neural network based plant classifier *Comput Electron Agric* vol. 31(2004), p. 5-16.
- [11] D.W. Sun: Inspecting pizza topping percentage and distribution by a computer vision method *J Food Eng* vol. 44 (2000), p. 245-249.
- [12] F. Vogt, S. Banerji and K. Booksh: Utilizing three-dimensional wavelet transforms for accelerated evaluation of hyperspectral image cubes. *J Chemometrics* vol. 18 (2004), p. 350-362.
- [13] J. Qin and R. Lu: Measurement of the absorption and scattering properties of turbid liquid foods using hyperspectral imaging *Applied Spectroscopy* vol. 61(2007), p. 388-396.
- [14] G. ElMasry, N. Wang, A. ElSayed and M. Ngadi: Hyperspectral imaging for nondestructive determination of some quality attributes for strawberry *J Food Eng* vol. 81(2007), p. 98-107.
- [15] Y.L. Liu, Y.R. Chen, M.S. Kim, D.E. Chan and A.M. Lefcourt: Development of simple algorithms for the detection of fecal contaminants on apples from visible/near infrared hyperspectral reflectance imaging *J Food Eng* vol. 81(2007), p. 412-418.
- [16] P. M. Mehl, Y.R. Chen, M.S. Kim and D.E. Chan: Development of hyperspectral imaging technique for the detection of apple surface defects and contaminations *J Food Eng* vol. 61(2004), p. 67-81.
- [17] B. Park, M. Kise, K.C. Lawrence, W.R. Windham, D.P. Smith and C.N. Thai: Real-time multispectral imaging system for online poultry fecal inspection using unified modeling language *Sens Instrum Food Quality saf* vol. 1(2007), p. 45-54.
- [18] J. Qiao, M.O. Ngadi, N. Wang, C. Garipey and S.O. Prasher: Pork quality and marbling level assessment using a hyperspectral imaging system *J Food Eng* vol. 83(2007), p. 10-16.
- [19] J. Qiao, N. Wang, M.O. Ngadi, A. Gunenc, M. Monroy, C. Garipey, S.O. Prasher: Pork quality and marbling level assessment using a hyperspectral imaging system. *Meat Science*, vol. 76(2007), p. 1-8.
- [20] J. Qin, T.F. Burks, M.A. Ritenour, and W.G. Bonn: Detection of citrus canker using hyperspectral reflectance imaging with spectral information divergence *J Food Eng* vol. 93(2009), p. 183-190
- [21] J. Gomez-Sanchis, L. Gomez-Chova, N. Aleixos, G. Camps-Valls, C. Montesinos-Herrero, E. Molto and J. Blasco: Hyperspectral system for early detection of rottenness caused by *Penicillium digitatum* in mandarins *J Food Eng* vol. 89(2008), p. 80-86.
- [22] Y. Peng, R. Lu: An LCTF-based multispectral imaging system for estimation of apple fruit firmness: Part I. Acquisition and characterization of scattering images *Trans ASAE* vol. 49(2006), p. 259-267
- [23] B. Zhu, L. Jiang, F. Jin, L. Qin, A. Vogel and Y. Tao: Walnut shell and meat differentiation using fluorescence hyperspectral imagery with ICA-kNN optimal wavelength selection *Sens Instrum Food Quality saf* vol. 1(2007), p. 123-131.
- [24] P. Rajkumar, N. Wang, G. ElMasry, G.S.V. Raghavan and Y. Garipey: Studies on banana fruit quality and maturity stages using hyperspectral imaging *J Food Eng* vol. 108(2012), p. 194-200.
- [25] G. Polder, G.W.A. M. van der Heijden and I.T. Young. Spectral image analysis for measuring ripeness of tomatoes *Trans ASAE* vol. 45(2002), p. 1115-1116.
- [26] D.P. Ariana, R. Lu: Quality evaluation of pickling cucumbers using hyperspectral reflectance and transmittance imaging: Part I. Development of a prototype *Sens Instrum Food Quality saf* vol. 2(2008), p. 144-151.



- [27] A.A. Gowen, C.P. O'Donnell, M. Taghizadeh, P.J. Cullen, J.M. Frias and G. Downey: Hyperspectral imaging combined with principal component analysis for bruise damage detection on white mushrooms (*Agaricus bisporus*) *J Chemometrics* vol. 22(2008), p. 259-267.
- [28] W. Wang, C. Li, E.W. Tollner, R.D. Gitaitis and G. C. Rains: Shortwave infrared hyperspectral imaging for detecting sour skin (*Burkholderia cepacia*)-infected onions *J Food Eng* vol. 109(2012), p. 38-48..
- [29] N. Nguyen Do Trong, M. Tsuta, B.M. Nicolai, J. Baerdemaeker and W. Saeys: Prediction of optimal cooking time for boiled potatoes by hyperspectral imaging *J Food Eng* vol. 105(2011), p. 617-624.
- [30] K. Chao, P.M. Mehl and Y.R. Chen: Use of hyper- and multi-spectral imaging for detection of chicken skin tumors *Applied Eng Agric* vol. 18(2002), p. 113-119.
- [31] G. ElMasry and J.P. Wold: High-speed assessment of fat and water content distribution in fish fillets using online imaging spectroscopy *J Agric Food Chem* vol. 56(2008), p. 7672-7677.
- [32] Y. Peng, J. Zhang, W. Wang, Y. Li, J. Wu, H. Huang, X. Gao, and W. Jiang: Potential prediction of the microbial spoilage of beef using spatially resolved hyperspectral scattering profiles *J Food Eng*, vol. 102(2011), p. 163-169.
- [33] M. Kamruzzaman, G. ElMasry, D. Sun and P. Allen: Application of NIR hyperspectral imaging for discrimination of lamb muscles. *J Food Eng* vol. 104(2011), p. 332-340.
- [34] R.P. Cogdill, C.R. Hurburgh and G.R. Rippke. Spectral image analysis for measuring ripeness of tomatoes *Trans ASAE*, vol. 47(2004), p. 311-320.
- [35] J. Xing, P. Huang, S. Symons, M. Shahin and D. Hatcher. Using a short wavelength infrared (SWIR) hyperspectral imaging system to predict alpha amylase activity in individual Canadian western wheat kernels *Sens Instrum Food Quality saf*, vol. 3(2009), p. 211-218.
- [36] H. Yao, Z. Hruska, R. Kincaid, R. Brown, T. Cleveland and D. Bhatnagar: Using a short wavelength infrared (SWIR) hyperspectral imaging system to predict alpha amylase activity in individual Canadian western wheat kernels *Food Additives & Contaminants*, vol. 27(2010), p. 701-70.
- [37] J. Zhao, Q. Chen, J. Cai and Q. Ouyang Automated tea quality classification by hyperspectral imaging *Applied Optics*, vol. 48(2009), p. 3557-3564.
- [38] J. Qin, K. Chao and M. S. Kim: Raman chemical imaging system for food safety and quality inspection *Trans ASAE*, vol. 53(2010), p. 1873-882.
- [39] F. Hahn: Multi-spectral prediction of unripe tomatoes. *Biosystems Engineering, Biosystems Engineering* vol. 81(2002), p. 147-155.
- [40] M.S. Kim, K. Lee, K. Chao, A.M. Lefcourt, W. Jun and D.E. Chan: Multispectral line-scan imaging system for simultaneous fluorescence and reflectance measurements of apples: multitask apple inspection system *Sens Instrum Food Quality saf* vol. 2(2008), pp. 123-129.
- [41] K. Chao, C.C. Yang, M.S. Kim and D. E. Chan: High throughput spectral imaging system for wholesomeness inspection of chicken *Applied Eng Agric* vol. 24(2008), p. 475-485.
- [42] D. Wu, H. Yang, X. Chen, Y. He, and X. Li: Application of image texture for the sorting of tea categories using multi-spectral imaging technique and support vector machine *J Food Eng* vol. 88(2008), p. 474-483.
- [43] L. Lleo, P. Barreiro, M. Ruiz-Altisent and A. Herrero: Multispectral images of peach related to firmness and maturity at harvest *J Food Eng*, vol. 93(2009), p. 229-235.